



CP COLOR 400 SH


Standard filter only (17.0° 10% - 7.8° 50%)

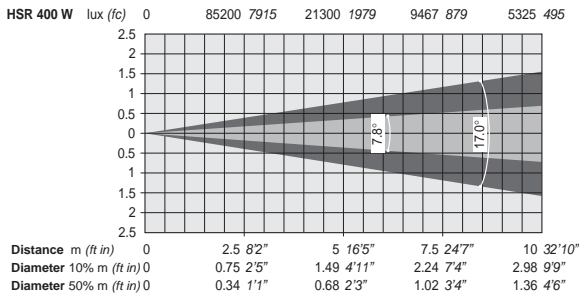


With optional diffusion filter (72.7° 10% - 50.5° 50%)

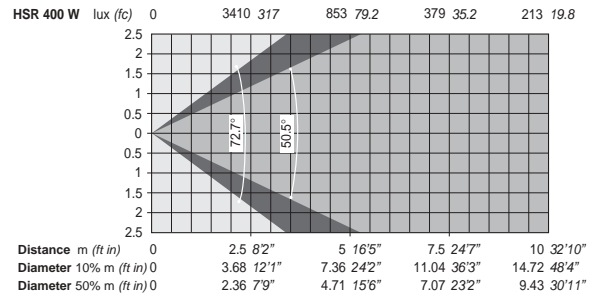


With optional frost filter "C" (22.1° 10% - 10.8° 50%)

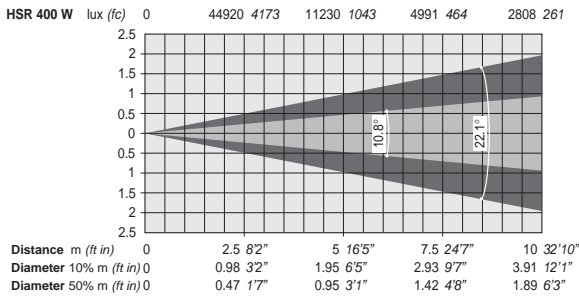


With optional ovalizer filter (X-axis) (64.6° 10% - 40.1° 50%)

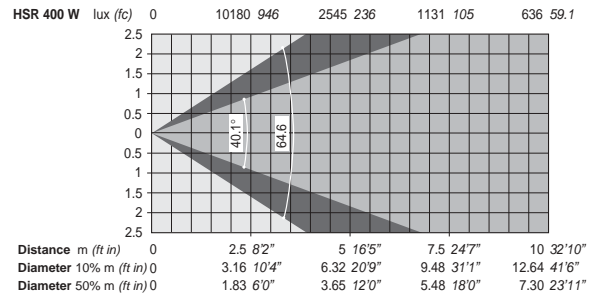


With optional frost filter "400" (31.6° 10% - 14.2° 50%)

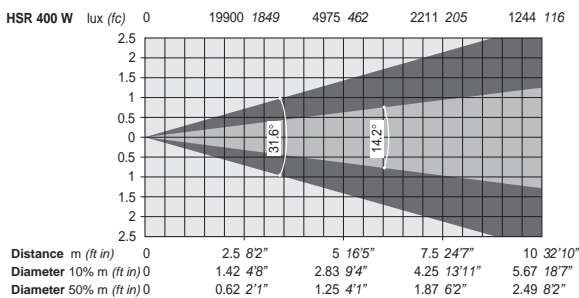

With optional ovalizer filter (Y-axis) (33° 10% - 17° 50%)

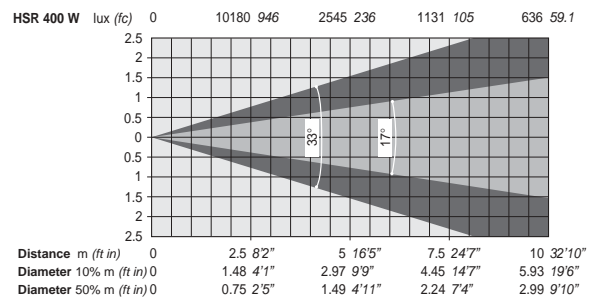

With optional frost filter "90" (53.1° 10% - 19.1° 50%)

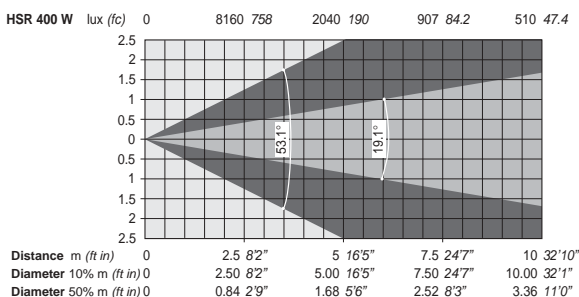

Legenda

Diameter 10%-50%: valori del diametro del fascio luminoso corrispondenti al 10% e 50% dell'illuminamento massimo.

Key

Diameter 10%-50%: beam diameter for 10% and 50% of maximum illumination.

Légende

Diameter 10%-50%: valeurs du diamètre du faisceau lumineux correspondant à 10% et 50% de l'éclairage maximum.

Legende

Diameter 10%-50%: Lichtkreis-Durchmesser bei 10% bzw. 50% maximaler Ausleuchtung.

Legenda

Diameter 10%-50%: valores del diámetro del haz luminoso correspondientes al 10% y 50% de la iluminación máxima.